

# Sussex Research Online

## How much wind power potential does Europe have? Examining European wind power potential with an enhanced socio-technical atlas

Article (Accepted Version)

Enevoldsen, Peter, Finn-Hendrik, Permien, Bakhtaoui, Ines, von Krauland, Anna-Katharina, Jacobson, Mark Z, Xydis, George, Sovacool, Benjamin, Valentine, Scott V., Luecht, Daniel and Oxley, Gregory (2019) How much wind power potential does Europe have? Examining European wind power potential with an enhanced socio-technical atlas. *Energy Policy*, 132. pp. 1092-1100. ISSN 0301-4215

This version is available from Sussex Research Online: <http://sro.sussex.ac.uk/id/eprint/85013/>

This document is made available in accordance with publisher policies and may differ from the published version or from the version of record. If you wish to cite this item you are advised to consult the publisher's version. Please see the URL above for details on accessing the published version.

### **Copyright and reuse:**

Sussex Research Online is a digital repository of the research output of the University.

Copyright and all moral rights to the version of the paper presented here belong to the individual author(s) and/or other copyright owners. To the extent reasonable and practicable, the material made available in SRO has been checked for eligibility before being made available.

Copies of full text items generally can be reproduced, displayed or performed and given to third parties in any format or medium for personal research or study, educational, or not-for-profit purposes without prior permission or charge, provided that the authors, title and full bibliographic details are credited, a hyperlink and/or URL is given for the original metadata page and the content is not changed in any way.

# How Much Wind Power Potential Does Europe Have? Examining European Wind Power Potential with an Enhanced Socio-Technical Atlas

Peter Enevoldsen<sup>\*1</sup>, Finn-Hendrik Permien<sup>2</sup>, Ines Bakhtaoui<sup>3,4</sup>, Anna-Katharina von Krauland<sup>5</sup>, Mark Z. Jacobson<sup>5</sup>, George Xydis<sup>1</sup>, Benjamin K. Sovacool<sup>1,7</sup>, Scott V. Valentine<sup>7</sup>, Daniel Luecht<sup>8</sup>, Gregory Oxley<sup>9</sup>

1.Center for Energy Technologies, Aarhus University, Denmark

2.Siemens Gamesa Renewable Energy A/S, Denmark

3. Imperial College Business School

4. Ecole Nationale Supérieure des Mines de Saint-Etienne

5. Department of Civil and Environmental Engineering, Stanford University, United States

6. Science Policy Research Unit (SPRU), School of Business, Management, and Economics, University of Sussex, United Kingdom

7. RMIT University, Australia

8.Envision Energy CoE GmbH, Germany

9 Envision Energy USA Ltd., USA

\*Corresponding Author, Department of Business Development and Technology, BTECH Aarhus BSS Aarhus University, Birk Centerpark 15, 7400 Herning, Denmark  
Email: [peterenevoldsen@btech.au.dk](mailto:peterenevoldsen@btech.au.dk) Tel: +45 51670396

**Abstract:** The continuous development of onshore wind farms is an important feature of the European transition towards an energy system powered by distributed renewables and low-carbon resources. This study assesses and simulates potential for future onshore wind turbine installations throughout Europe. The study depicts, via maps, all the national and regional socio-technical restrictions and regulations for wind project development using spatial analysis conducted through GIS. The inputs for the analyses were based on an original dataset compiled from satellites and public databases relating to electricity, planning, and other dimensions. Taking into consideration socio-technical constraints, the study reveals 52.5 TW of untapped onshore wind power potential in Europe - equivalent to 1 MW per 16 European citizens – a supply that would be sufficient to cover the global energy demand from now through to 2050. The study offers a more rigorous, multi-dimensional, and granular atlas of onshore wind energy development that can assist with future energy policy, research, and planning.

**Keywords:** Wind Energy; Wind Power, Wind Atlas, Resource Assessment, Energy Policy, GIS


This is the author's accepted version of an article forthcoming in Energy Policy (2019)

## 1. Introduction

The European Commission's energy strategy for 2050 explicitly calls for a substantive increase in installed renewable energy capacity and a concomitant reduction of emission of greenhouse gasses [1], with wind energy being recognized in various studies to be a critical enabler for achieving 100% national renewable energy penetration [2-4]. Such conclusions are often supported on the grounds that wind energy has immense technical potential to deliver useful electricity and energy services. As Archer and Jacobson (2005) projected, capturing 20% of global technical potential of wind power would satisfy the entire world's need for energy, and using more advanced wind turbine technologies in the pipeline would [2] yield a potential global installed capacity of 400,000 GW [3].

In Europe, a total of 169 GW of wind power capacity (31.3 % of the world's total capacity) was installed at the end of 2017 [4], with the majority of the capacity located onshore in Western European countries. This represents nearly one-third of global wind power generation capacity. Figure 1 illustrates that despite all of the promise of offshore wind, onshore wind power installations still dominate the market, and continue to grow in significant numbers annually in Europe.

**Figure 1 The Annual Wind Power Development in Europe**

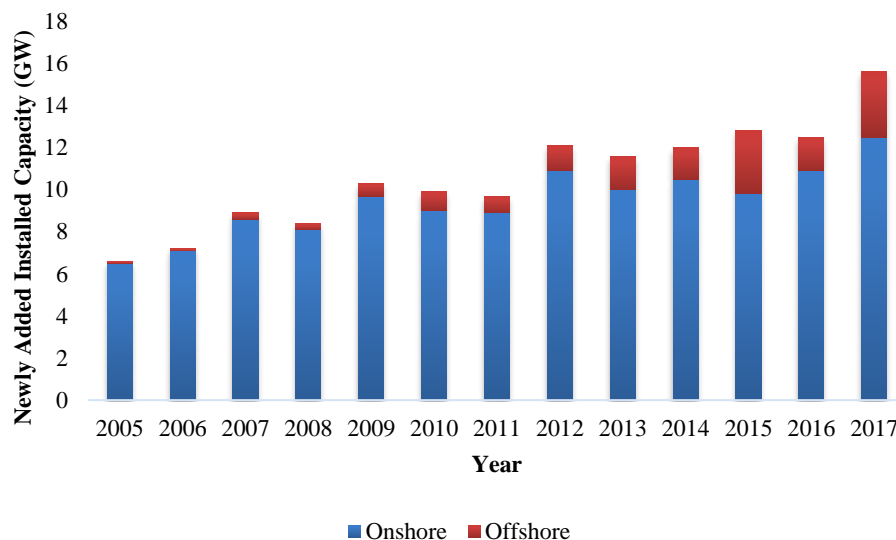

Despite progressive growth, the ambitious goals from the European Energy Commission can only be reached by installing more wind power capacity (both onshore and offshore) and improving the efficacy of existing wind power systems. The European Commission projects that new installations and upgrades will total at least 100,000 wind turbines before 2050 [5].

However, the European Commission has also recognized that growing public opposition could make it difficult to reach this ambitious target [5]. Public opposition is complex, and it often stems from visual (aesthetic), environmental, and socioeconomic concerns, especially in regard to onshore wind projects [6]. Concern is exacerbated when local policies fail to provide clear guidelines for wind project development [6]. In sum, the erosion of public support and siting increasing costs coupled with the emergence of promising innovations in offshore foundations [7] and the allure of more reliable offshore wind conditions

have tempered onshore wind growth projections and positioned offshore wind installations as the systems with greatest growth potential in Europe in the coming years [8].

Yet, the sheer magnitude of the required build out of renewable energy compels national planners to explore all siting options, including the prospects of exploiting untapped onshore wind power potential. Onshore wind energy deployment continues to be supported by various national policies [9], with policy focusing on minimizing public opposition and reducing the cost of developing onshore projects [10]. Onshore projects continue to play an important role in national and regional energy strategies. Indeed, Jacobson and colleagues [11] contend that onshore wind power will continue to be a dominant energy resource in Europe with a projected installation of up to 10,288 GW in onshore wind power capacity by 2050<sup>1</sup>. Even in locations such as the Nordic region, already known for aggressive wind deployment in countries such as Denmark, wind energy production is expected to grow fivefold from 7% of regional electricity supply to 30% by 2050 with two thirds of this additional generation capacity expected from onshore installations [12]. Based on the above, it is clear that effective siting strategies for facilitating onshore wind project development are needed to bolster the transition towards a European continent powered by 100% renewables.

A first step in developing a wind power development strategy for Europe is to quantify wind power potential at a scale that exhibits sufficient detail to guide site selection in a comprehensive enough manner to highlight threats to site development so that siting and stakeholder engagement strategies can be developed. Technologically, wind energy potential has already been calculated through an ever expanding body of physical science work. For example, in 2009, the European Environment Agency (EEA) published a report on the wind energy potential in Europe [13]. Onshore technical potential was estimated to be 45,000 TWh/yr by 2030. One other noteworthy aspect of the European Energy Commission study was a forecast of where electricity from wind systems will be least expensive within the EU [13]. The study concluded that preferred sites are located mainly in Western Europe due to the favorable wind speeds and flat areas. Switzerland, Austria, Norway, Northern Spain and the southern and southeastern parts of France, which all benefit from higher elevations, were the only exceptions. Other studies echoed the assessment that Western European countries were the most promising targets for wind power [14] [15]. The European Energy Agency report partially explained the bias toward wind power development in Western Europe by noting that wind power developments in Eastern European countries may not be cost-competitive until 2030 [13].

Unfortunately, these analyses of wind power potential share numerous shortcomings that prevent strategic planning. One study found that when environmentally protected zones and other areas of ecological sensitivity were factored into the equation, realizable technical potential drops nearly 13% to 39,000 TWh/yr [16]. In addition, the 2009 wind map produced in the EEA report is now outdated because technical capacity estimates were based on the deployment of turbine technology that is now more than a decade old. Furthermore, assessment tools have become more sophisticated over the past decade, yield far better resolution for planners. Increasingly, Geographical Information System (GIS)-based wind atlases are being developed which include more parameters than previous atlases that were limited to potential site identification through only the exclusion of national parks and nature preserves. New atlases have been developed using advanced GIS data at both the national and sub-national levels and provide far more detailed insight into prospective wind energy sites. They employ resolution that focuses attention on houses,

---

<sup>1</sup> Jacobson, et al. (2017) included all of Russia, which is why that number has been multiplied by 0.25 in order to define the European potential of the country.

roads, and protected areas. They also are able to identify far more exclusionary factors including national restrictions due to military interests, politically restrictive areas, and terrains not suitable for wind power generation [17] [18].

Nevertheless, such studies have never been aggregated on a continental scale. Thus, the dual aim of this study is to both update wind power potential estimates for Europe while also introducing a more qualitative, refined socio-technical dimension to the analysis in order to help policymakers and wind developers prioritize realizable potential lies. The study therefore presents a socio-technical wind atlas for all European countries – it intends aims to answer the critical question: How much wind power potential does Europe have after infrastructure, built-up areas and protected areas are factored in?

## **2. Research Methods**

In our nation by nation analysis, the foundation of our methodology is predicated on high spatial resolution of the wind data. The process began with a high-resolution mesoscale wind data set. To this model, a set of restrictions to wind power planning based on limitations posed by infrastructure, built-up areas and protected areas were identified and layered onto the map. This map can therefore be considered to be a socio-technical wind atlas, where the socio-technical analysis is predicated on an interdisciplinary analysis combining 1) common wind atlas construct methodology centering of information on wind resources, with 2) high resolution exclusion of areas where wind project development is hampered by socially centered constraints to siting. Our analysis reflects a more detailed analysis of realization technical potential by incorporating restrictions into the analysis. This approach was inspired by the work of Sovacool [19] who suggested that energy engineering must become more interdisciplinary by taking into account social science and social challenges if it is to yield useful insights for policymaking and planning.

Although, there are precedents of wind atlases that integrate restrictions into technical wind power potential analysis using GIS-based software, Enevoldsen and Permien [20] note that the majority of these studies were carried out only for single countries or based on low-resolution datasets. None exhibit the level of aggregation that our model represents. It merits noting that previously proven methods were used to guide our methodological choices, such as Noorollahi and colleagues work [18], which applied restrictions to wind condition analysis in order to define the level of suitability for new wind projects.

We decided to make use of open data for our analysis for transparency purposes following Enevoldsen and Permien [20] who employed a similar approach of defining constraints for wind power development based on open data. However, because the spatial coverage of this study is greater, an adaptation of the approach [20] was made and global rather than regional or national sources were accessed when possible.

From a tool perspective, QGIS [21], an open source GIS, was used in this study to access, process and analyze siting restrictions and lay these “no go” zones over the wind potential maps, however, other GIS programs could replace QGIS [20]. The reason for selecting QGIS is that it is the most used open source GIS program and complements the open data applied in this study. This will enhance replicability and future updates to the analysis.

To ensure consistency in the data processing and information layering, a sequential process was undertaken which gradually layered each category of data using QGIS. To guide this process, the functions expressed in Table 1 were used:

**Table 1 The Functions Carried out in QGIS**


<b>Function</b>	<b>Short Description</b>
<Add Field>	Attaching a new attribute field to the selected layer
<Buffer>	Creating a polygonal zone around the features in the selected layers with a specified distance
<Fill by Expression>	Using a query to copy values into an attribute field
<Merge>	Adding layers together including all features and attributes
<Re-project Layer>	Using a coordinate transformation to convert the selected layer into another Coordinate Reference Systems (CRS)
<Export Features>	Saving all or only selected geometries and attributes of a layer to a new layer
<Select by Expression>	Using a query to single out features from a layer
<Simplify Geometries>	Reducing the number of points defining a polygon or line feature to reduce the size but at the cost of detail

Although mapping natural protected areas, various buildings and infrastructure would follow the process described in Table 1 and Figure 2, a more nuanced approach was needed to process the waterways and rivers. These water bodies are defined as a line feature in the data, while the riverbanks and lakes are defined as through polygon constructs. The waterways and rivers are delineated on one layer whilst the riverbanks and lakes are delineated in a different layer. The aim of this procedure is to create one layer showing all areas containing water. Furthermore, in order to depict the actual width of the waterways and rivers, the OSM data attribute “width” was used. Since the buffer method is using a value to create a spatial polygon on each side of the line feature, half of the “width” was used to create polygons representing the actual size of the waterway and rivers. In order to avert zero values in the expression, which would result in errors, a case-expression was defined. Once processed, the resulting layer was merged with the layer including riverbanks and lakes to create a water layer.

## 2.1 Constructing the Socio-Technical Wind Atlas

The overall basis of our approach is predicated on guidance from Voivontas [22] who suggested that the estimation of a region’s maximum wind energy output must include constraints which exclude sites where wind power potential is not realizable due to social constraints. A schema of the process leading to the socio-technical wind atlas is illustrated in Figure 2

**Figure 2 The Process of Constructing a Socio-Technical Wind Atlas for Western Europe**

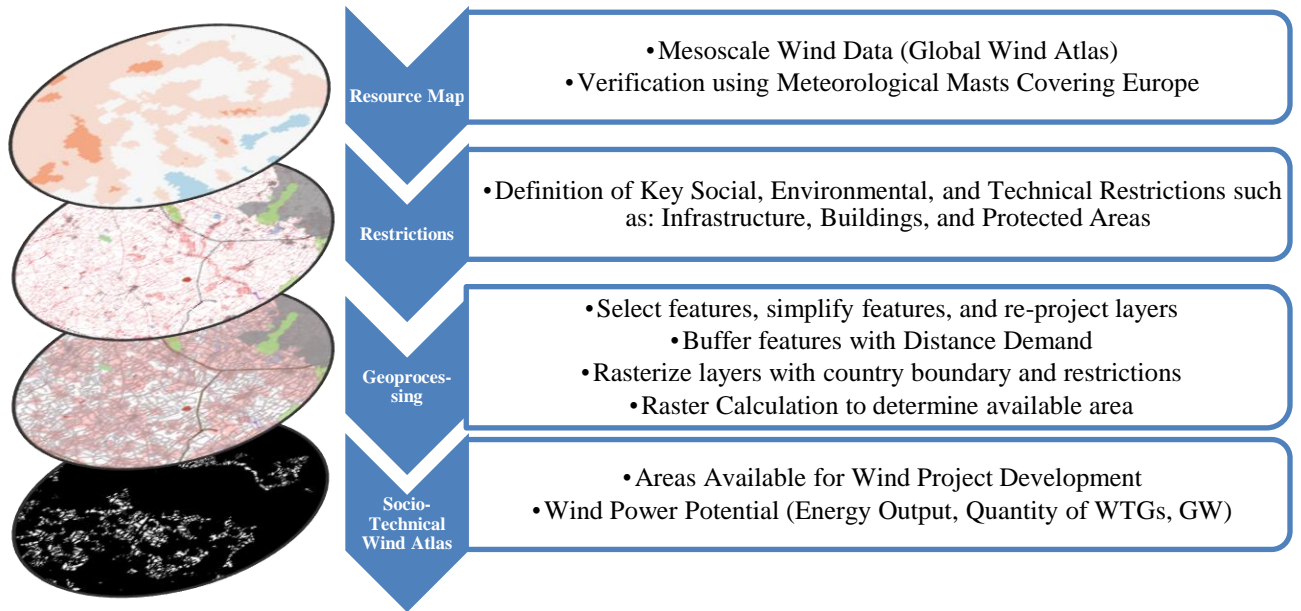

Restrictions were categorized into three main groups: infrastructure, buildings, and protected areas. They are described further in Table 2. The restricted areas and associated shapefile layers were processed using QGIS. The geoprocessing algorithms *Select*, *Simplify*, and *Re-Project* were run to process these layers. As an additional next step, the layers were buffered with country specific distance regulations.

**Table 2: Restrictions and Sources for the socio-technical wind atlas for Europe**

Restriction	Content	Description	Source
Infrastructure	Roads, waterways, airports, and railways	Distances need to be kept from roads and railways, mainly due to safety issues.	OpenStreetMap (geofabrik.de)
Buildings	Residential, industrial, military, public, and existing wind turbines	Distances to buildings are considered one of the most important restrictions, especially as the distance, or lack thereof, to residential buildings has caused numerous complaints and eventually stopped the development of wind projects [6].	OpenStreetMap (geofabrik.de)
Protected Areas	Castles, monuments, areas protected by Natura2000, Special Protection Area, Flora Fauna Habitat, etc.	Different regulations exist in each of the targeted countries; yet, for all the countries, a longer distance from historical landmarks is mandated. Similarly, wind turbines cannot be deployed in areas protected by the Natura 2000 regulations.	Natura2000 (Copernicus / European Environmental Agency)

There were some critical assumptions made in the process of overlaying restrictions onto the wind maps. Some countries do not have comprehensive regulations covering all infrastructure, buildings, and protected areas, and therefore proxies of 200 meters (infrastructure) and 1000 meters (buildings) were applied in order to adhere to modern wind turbine general safety measures. For existing wind turbines, a buffer proxy of 700 meters was applied to minimize potential wake effects [23]. The next step was to combine the restrictions in each country into a unified layer structure covering Europe. Several restrictions overlap with each other; consequently, a three-step procedure suggested by Enevoldsen and Permien [20] was used to compute the available potential. In the process, a rasterizing algorithm was used to convert the complex vector layers into a 10x10m grid containing country boundaries and restrictions. The resulting grids in GEOTiff format were then withdrawn, resulting in a unified layer showing the potential area available for onshore wind power in Europe after all restrictions have been included.

### **3. Evaluation of the Wind Atlas**


This section presents key elements of the wind atlas and discusses implications that arise from the data.

#### **3.1 Estimating Wind Resources**

Figure 3 illustrates how diverse Europe's wind resources are. The map in Figure 3 presents the annual mean wind speeds 100 meters above ground level, and covers all of the European countries targeted in this research.



Figure 3: Annual mean wind speeds at 100 meters above ground level in Europe (Wind data from [15])

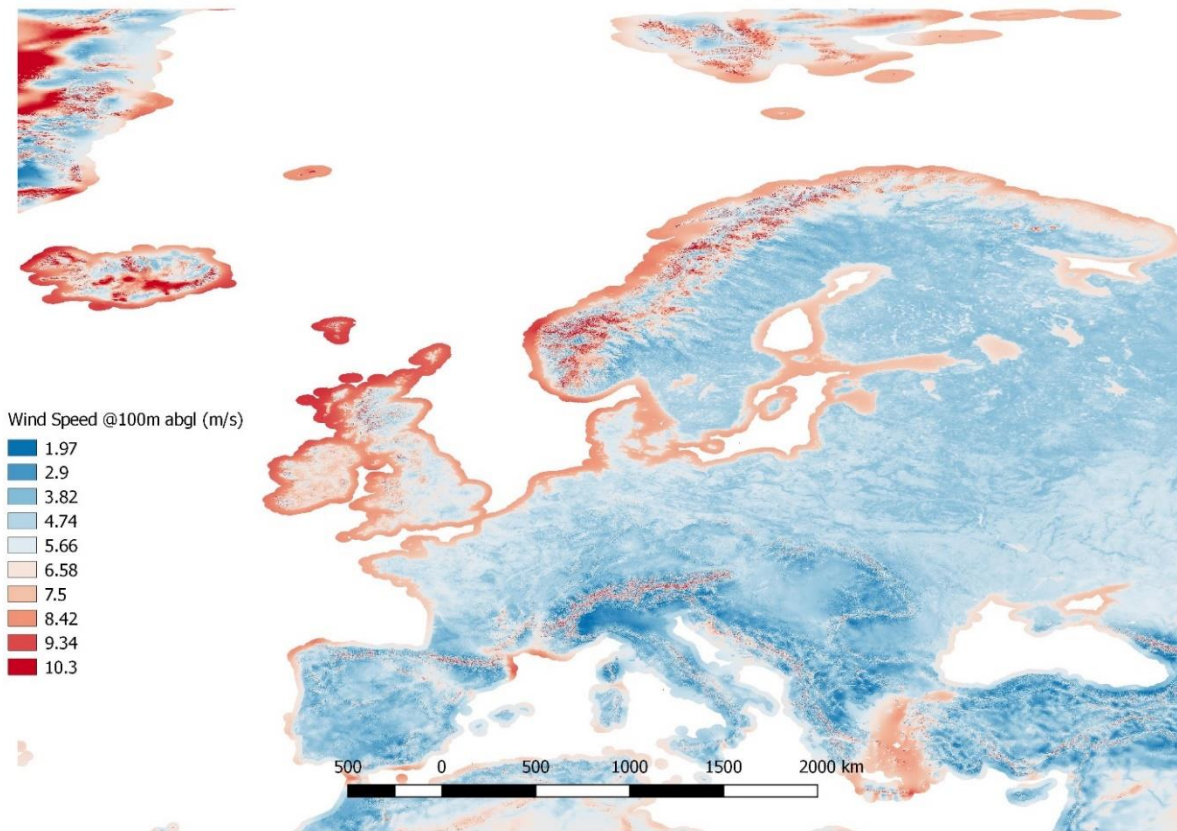

By examining Figure 3, it is apparent that higher wind speeds are observed along the Atlantic Ocean, North Sea and Baltic Sea coasts as well as throughout the UK, Iceland, Ireland, and Denmark. There are also strong wind speeds along the southern coast of France and along the coastlines of the Aegean Sea. Wind speeds are significantly lower in the southern part of Germany, the central, southern, and eastern sections of Spain, the eastern region of France, the central regions of Italy, the Balkans, the central part of Eastern Europe, the south-eastern part of Norway, and the Northern part of Sweden.

Clearly this suggests that a one-size-fits-all wind power development policy will not suit Europe. For nations with coastlines that border the Atlantic or even for other coastal zones such as along the Aegean and Mediterranean seas, a focus on coastal development policy is likely to optimize economic performance. However, as we are seeing in Germany and Denmark, over-development in any one area runs the risk of engendering public opposition. Meanwhile, the inland regions in many of the nations with ample coastal wind power potential will likely to need government support in order to attract wind power developers to sites with lower wind potential.

For other nations, such as Spain, Italy and the central part of Eastern Europe, robust policies will be needed to even attract developers' attention. The revenues from producing wind energy in these nations are going to be lower than in nations such as Denmark and Germany, due to inferior wind potential. This places

governments in these regions at a disadvantage when it comes to meeting European renewable energy targets through wind system installations.

### 3.2 Compiling Wind Data and Power Curves

The extensive dataset from Noorollahi and colleagues [18] created by the World Bank and the Technical University of Denmark was used as our foundational wind resource map. The data is based on a mesoscale model with a spatial resolution of  $0.01^\circ \times 0.01^\circ$ , approximately 1x1 km, and an hourly temporal resolution. The benefit of using this specific dataset stems from the height availabilities, as it records wind conditions at 100 meters. This height correlates best with the average hub heights of turbines found in Europe, which range from 80-125 meters onshore. The dataset was validated by testing it against 27 meteorological masts located across Europe, with the recognition that the topography and surface obstacles can widely differ, from the flat agriculture areas in the Netherlands and the large British forests, to the complex regions in Sweden and that global data sets might miss such nuances. The exact locations of the meteorological masts have been anonymized due to a confidentiality agreement with the data provider.

The majority of the measurements at the meteorological masts were at 100 m, comparable with data from the mesoscale model. However, when data was not available at 100 m, measurements were extrapolated from 5-10 meters above the ground to 100 m using the wind profile law presented in (1).

$$V = V_{ref} * \frac{\ln \frac{z}{z_0}}{\ln \frac{z_{ref}}{z_0}} \quad (1)$$

where  $V$  is the wind speed at height  $z$  above ground level,  $V_{ref}$  is the known wind speed at height  $z_{ref}$  above ground level, and  $z_0$  is the roughness length for momentum. The data are presented in the graphs in Figures 2, 3 and 4 in the supplemental information. Key differences for wind speed and dominating wind directions for the three most prominent geographic configurations (forest, flat and complex) are illustrated in Table 3.

**Table 3 Difference between the Mesoscale Dataset and the Physical Measurements**

Configuration	Measure	Wind Speed Difference (m/s)	Dominating Wind Direction (°)
Forest	Mean	0.53	33
	Median	0.45	30
	Max	1.40	90
	Min	0.07	0
Flat	Mean	0.49	17
	Median	0.43	30
	Max	1.20	30
	Min	0.03	0
Complex	Mean	0.62	67
	Median	0.57	30
	Max	1.45	150
	Min	0.05	0

The data presented in Table 3 confirm previous studies that have examined the disparities of wind conditions in wind sites surrounded by forests, and/or complex terrain [3] [24]. Despite the expected

challenges of irregular wind flows, the median wind speed difference varies between 0.43 m/s in flat terrain to 0.57 m/s in complex terrain and one sector (30 degrees) for the wind direction. For the purpose of constructing our wind atlas, this variance is not considered to be significant.

It merits noting that in order to create a wind atlas that is useful to policymakers and developers, the energy potential and restrictions were calculated for the different countries using the power curve and specifications from a multi-megawatt wind turbine, the Envision 4.5-148 wind turbine. A 4.5MW wind turbine was chosen to serve as a proxy for an optimal turbine size for the present time. This wind turbine type suits most onshore sites due to its large generator, variability to accommodate changing wind speeds, and its large rotor diameter, which can capture the energy of low wind speed sites and maximize the energy output from high wind speed sites.

### 3.3 Accounting for Restrictions and Limitations

Once restrictions were introduced to the technical wind power potential map, the resulting country map (in SI Section 6) reveals that infrastructure and buildings are the two major obstacle groups impeding wind project development. It merits noting that the barriers posed by these restrictions are not uniform in every nation. The population density in European nations varies greatly from 13 people/km<sup>2</sup> in Norway to 409 people/km<sup>2</sup> in the Netherlands. Therefore, the built-up environment does not pose nearly the restrictions in Norway as it does in the Netherlands. Protected areas also vary substantially between European countries. It merits further note that road and railway networks, as well as waterways, are relatively homogeneously distributed throughout Europe.

In addition, since wind turbines should not be deployed on mountains due to the installation cost and potential breakdown risk, the following areas were considered non-applicable for wind project development: The French Alps (14,792 km<sup>2</sup>), the Pyreness (13,215 km<sup>2</sup>), the mountains of southern Spain (14,793 km<sup>2</sup>), the Norwegian and Swedish mountains (71,564 km<sup>2</sup>), the German mountains in Tyrol (1,730 km<sup>2</sup>), and the mountains of great Britain (4,233 km<sup>2</sup>).

## **4. Results: A socio-technical analysis of European Onshore Wind Energy**

The number of potential realizable wind turbine installations were based on the following calculation for the area required per wind turbine generator (WTG):

$$(2) \text{ Potential WTGs} = \frac{\text{Available Area}(m^2)}{(4.375 \times 148m) \times (4.375 \times 148m)}$$

This number has then been divided with the nameplate capacity per turbine (4.5MW) in order to estimate the potential installed wind capacity (See Table 4).

**Table 4 Summarizing the output of the socio-technical wind atlas estimations for Europe**

<b>Parameter</b>	<b>Finding</b>	<b>Comments</b>
Area (km <sup>2</sup> )	10,737,064	54% of the European land is restricted for onshore wind project development. Restrictions are however
Restricted Area (km <sup>2</sup> )	5,841,503	

Area for wind project development (km <sup>2</sup> )	4,895,560	expected to increase as the population increases
Potential number of wind turbines	11,676,773 wind turbines equal to 52,545,479 MW installed	Based on previous studies, the cost for installing this amount of onshore wind turbines would be in the range of 1.20 – 1.65 \$/W <b>Invalid source specified.</b> , without considering economies of scale
Potential power output	138,090 TWh or 497 exajoules (EJ) when assuming a capacity factor of 30% <sup>2</sup>	The expected energy demand in the World in 2050 is 430 exajoules <b>Invalid source specified.</b>

Our socio-technical analysis reveals at least two significant findings.


#### 4.1 Onshore wind energy potential in Europe exceeds total global energy demand forecasts for 2050

Our findings suggest that Europe has far greater potential for onshore wind energy than previously suggested. The combined area of the European countries targeted in this research is approx. 1,0737,064 km<sup>2</sup>, where the European part of Russia (3,960,000 km<sup>2</sup>) is the largest landmass and Malta (316 km<sup>2</sup>) the smallest. Within the European landmass 5,841,503 km<sup>2</sup> constitutes restricted area, meaning that the remaining 4,895,560 km<sup>2</sup> can be used for wind project development. If this were fully realized it would equate to a shift in turbine density in Europe increasing from 1 MW per 4,564 inhabitants to 1 MW per 15 inhabitants (approximately). See Figure 5 S.5 for the current potential power density in Europe. Figure 4 below highlights the power density potential in Europe.

---

<sup>2</sup> The capacity factor of onshore wind turbines seems to be increasing **Invalid source specified.**


Figure 4 Potential power installation (MW) per capita in Europe

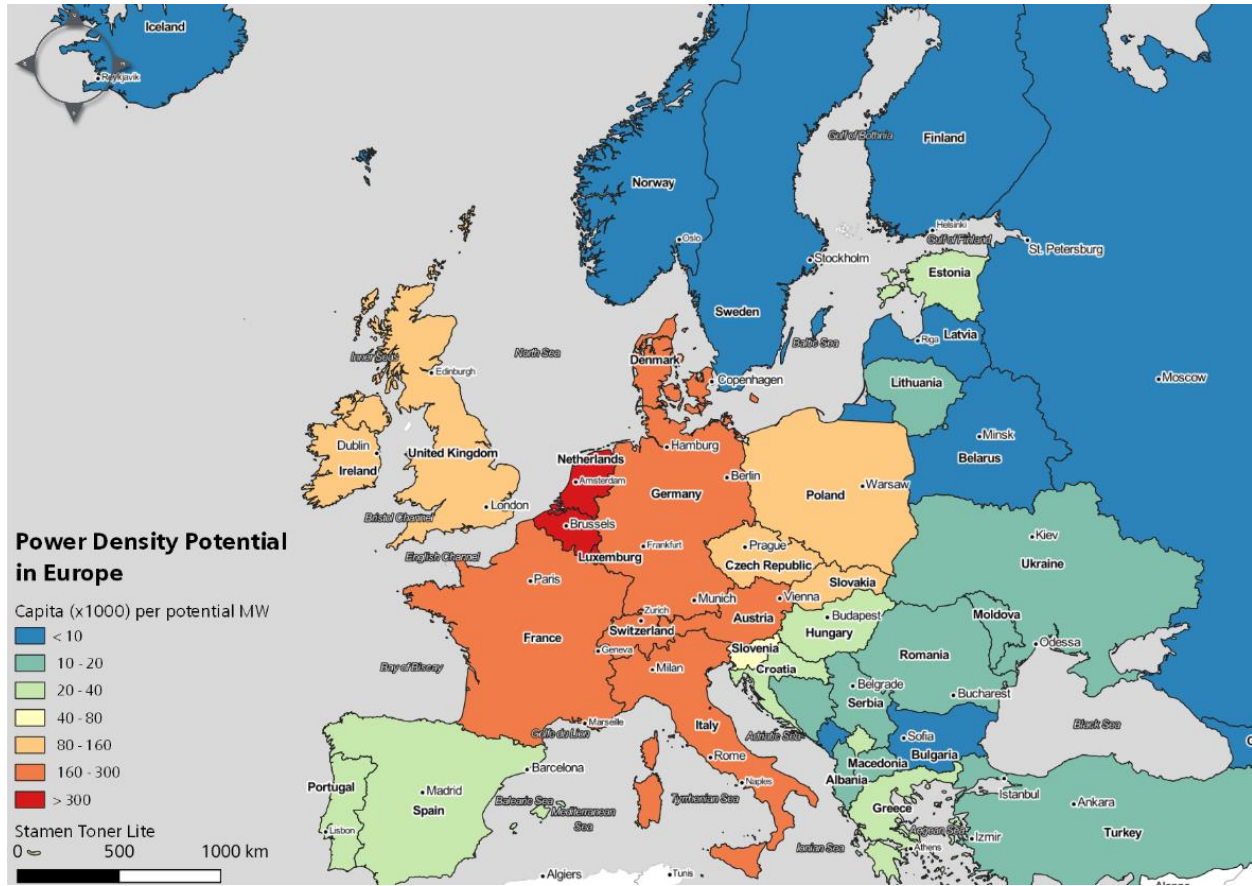

This estimate of realizable potential should not be misconstrued as being the same as viable realizable potential. Non-restricted land might not be available for wind project development due to other land use conflicts, private ownership, and social opposition [6]. However, viability in this sense is more about planning strategy. AFor example, as argued by Hou and colleagues [23] wind turbines can, and have, often been deployed in agricultural areas, side-stepping land use conflicts.

The data and maps for each country are listed in the supplemental information section 6. Furthermore, given the variance in area of each European country, an analysis has been carried out to examine the potential MW/km<sup>2</sup> for each of the countries in Figure 5. The combined potential is 4.893 MW/km<sup>2</sup> which is a staggering number compared to the current 0.017 MW/km<sup>2</sup>. Interestingly, large non-EU countries such as Turkey, Russia and Norway have the greatest potential for future wind power density.


Figure 5 The onshore potential for wind energy in Europe (MW/km<sup>2</sup>)

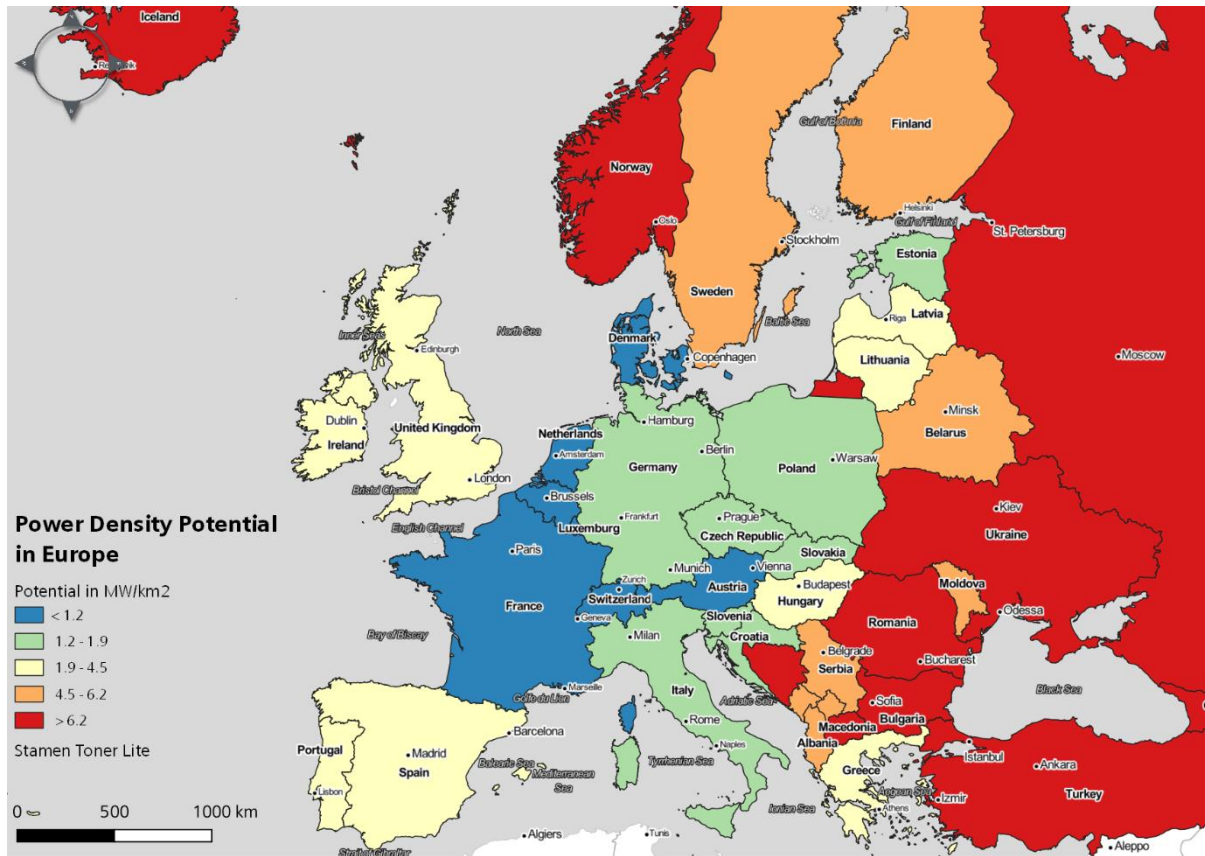

Europe has sufficient wind energy resources in onshore locales alone to meet and significantly exceed existing targets. The findings in the socio-technical wind atlas can be compared to previous studies [11] [4] and official national targets for the European countries' wind capacity. Such comparative analysis has been carried out and is presented in Figure 6.



**Figure 6 The Difference between the potential installed capacity and the 2050 (Onshore) targets**

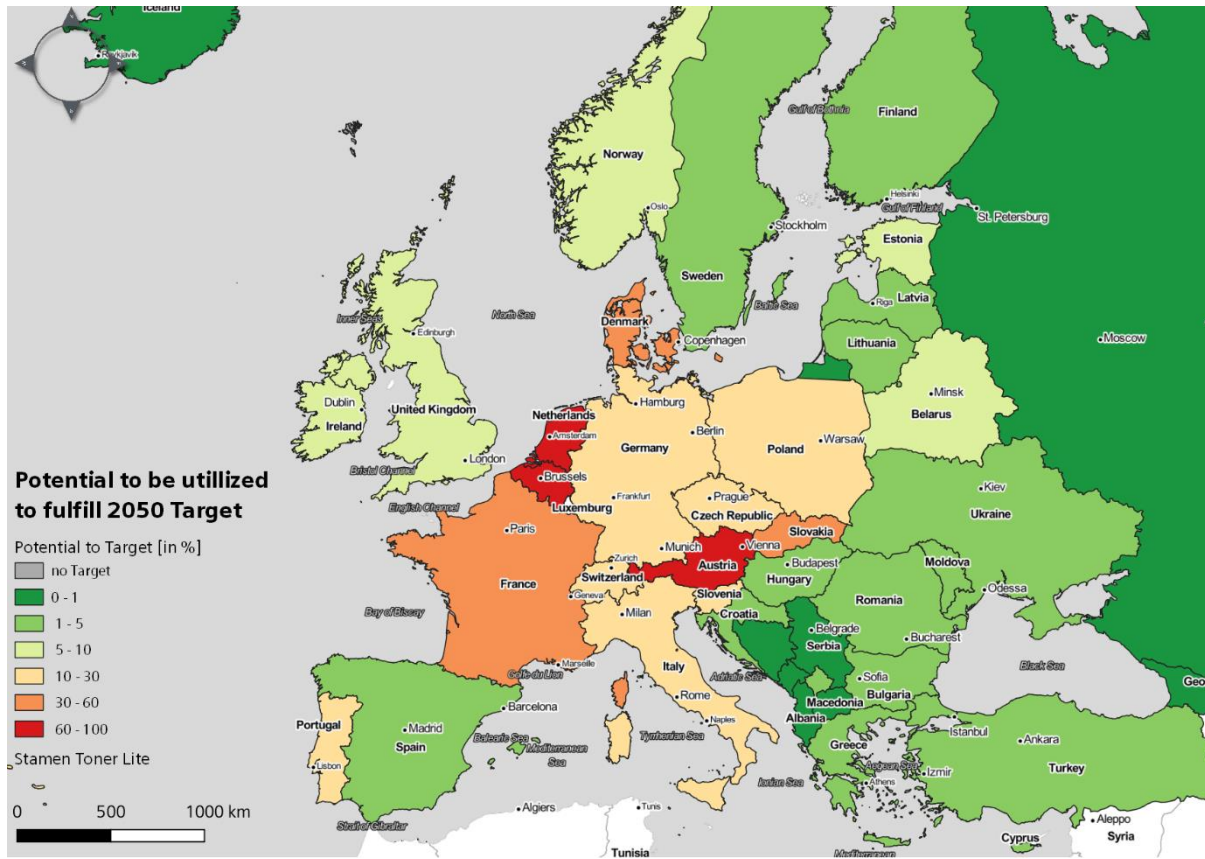

The current installed capacity and the 2020 targets are based upon on- and offshore wind power, which further indicates that some countries need to develop offshore wind farms in order to reach the targets, such as the Netherlands (7.296 GW for 2030), Belgium (1.681 GW for 2030), and Malta (0.048 GW for 2030). The comparisons to the 2020 and 2030 targets are listed in the SI Section 6.1. In addition, according to Figure 5, Luxembourg (0.48 GW for the onshore 2050 target) and Malta (0.098 GW for the onshore 2050 target) would not be capable of reaching the onshore 2050 targets unless they implement new policies for land use restrictions.

#### 4.2 Wind has a much smaller environmental footprint than previously envisioned

Our study challenges some of the conventional views about land use and the footprint of wind turbines. The spacing density of multi-megawatt wind turbines was examined by Enevoldsen and Valentine [10] for global onshore wind turbines with a mean European spacing density of 4.375D X 4.375D (Median minimum of 3.45 times the rotor diameter and median maximum of 5.3 times the rotor diameter). In 2019, Enevoldsen and Jacobson [25] conducted a specific spacing density exercise for more than 1,200 operating wind turbines. The result for onshore wind turbines in Europe was a spacing density of 14.1 (6.2-28.9) MW/km<sup>2</sup> which is in the range of what was suggested by Enevoldsen and Valentine [10].

## 5. Conclusion and Further Research

The policy impetus in the EU has been to exploit offshore wind potential [10] for various reasons including: i) offshore wind resources are stronger, ii) more predictable, iii) less turbulent at sea, iv) with fewer obstacles or changes in land topography to alter or slow wind speeds [26], v) more limited concerns about potential negative externalities such as visual impact, noise, and social opposition when done over the horizon and, vi) have lower wind-shear and fewer physical restrictions (such as passage under bridges) impeding transport and construction from harbor to site. Therefore, it is understandable that offshore wind power development will continue to be central to the EU's low-carbon transition.

However, as energy planners have learned in the past, relying on one technology or one development strategy engenders unnecessary risks that are abated through diversification strategies (ref). When it comes to wind power development, an upsurge in opposition to coastal developments could expose nations that invest only in offshore wind farms to NIMBY risk. Moreover, as climate change progresses, intensification of coastal storm activity places any system that relies largely on offshore wind power at risk of system-failure. Moreover, despite technological advances, onshore wind power is still a cheaper source of wind power generation. Offshore wind power comes with a levelized cost of electricity (LCOE) of 0.14 \$/KWh which exceeds the LCOE of onshore wind power of 0.06 \$/KWh [8]. For all of these reasons, further onshore wind power development should not be dismissed.

Our study suggests that realizable onshore wind power potential using existing technology in Europe alone is sufficient to generate enough power to satisfy total energy demand between now and 2050. Overall, our study concludes that realizable onshore wind power potential throughout Europe is much larger (52.5 TW in the annual average) than previous studies (what do previous studies estimate). Our estimate is more than three times the potential revealed by the European Environment Agency in 2009 [10]. This finding questions the academic and industrial concern of land use being a major constraint for renewable energy development. Future modeling exercises, technological pathways, and national scenarios ought to be recalibrated appropriately.

The discrepancy in finding is partly because our model integrated the role of current technology that has advanced considerably since the 2009 study was conducted. However, the discrepancy also highlights the statistical deviations that exist when conducting such studies. In our study, we have been very liberal in our identification of exploitable land. We have assumed that all of the land that we identified as being “non-restricted” can be developed. As we acknowledged earlier, much of this land will be under private ownership and subject to the aspirations of the land owners. Our estimate is “realizable” only in the context of be capable of development and unfettered by physical restrictions. Our estimate does not take into consideration social willingness to except wide scale development and does not delve deeply enough to highlight site specific factors that might prohibit development (e.g. competing land uses that are more economically attractive, physical attributes such as marshy soils that might complicate project development).

Notwithstanding these reservations, the results of this analysis reveal considerable onshore wind power potential exists at levels than far surpass previous estimates. In combination with offshore wind power potential and solar PV potential in areas where restrictions prohibit wind farms, it is clear that there is more



than enough clean energy potential to meet Europe's aspiration to move to 100% renewable energy generation, even when electric vehicle transport power needs are factored in.

The results of this study also highlight one other important insight in regard to these types of energy potential assessments: the assessment will change drastically if technology advances. This suggests that our finding that onshore wind power alone, if fully exploited, could satisfy global power needs represents a conservative estimate for future energy requirements given that wind power technology is still advancing.

In terms of future research directions, the methodological approach and application of open source data allows this study to be replicated for any continent, suggesting that this study can serve as a global planning tool for assessing global wind power potential and assisting in national and international wind project planning. Future studies can also employ this methodological approach as a foundation for more detailed studies, e.g. micro-siting of power output potentials, optimization of European wind power expansion, etc. To do so would additional layers of analysis simply need to be incorporated into the model.

At the planning level, the socio-technical wind atlas can provide guidance to European policymakers on where their wind power resources lay, which communities would be impacted and how extensive the wind power potential is. The individual high-resolution country maps will furthermore assist the planning of future renewable energy systems, as countries and regions will understand how much power can be generated through onshore wind resources, and therefore, highlight any supply gaps that might exist, which would require investment in alternative energy resources.

In extension of this work for Europe, future studies might be able to determine where a unified European wind power program should deploy wind farms in order to utilize the wind resources across the continent. Examining the wind atlas, it also becomes clear that wind turbine manufacturers will be forced to innovate on solutions for areas with wind speeds below 6 m/s because much of Europe is characterized by wind speeds that are between 3-6 m/s.

Critics will be tempted to point out that the stochastic nature of wind power – sometimes wind blows, sometimes it does not – suggests that, in the absence of adequate storage, concluding that onshore wind power potential in Europe is sufficient to cover global demand is disingenuous. Others might be tempted to question the practicality and viability of establishing wind turbines at the level of density used in the model. After all, even at 40% levels, onshore wind power has been challenged by NIMBY opposition in Europe (ref). To both critics the response is the same. Realizable wind power potential studies are not to be treated as blueprints for development. Such studies help policymakers understand what is possible as a ceiling, help planners target areas of particular attraction and help us understand where we are in terms of state of play concerning a given technology and its potential. For onshore wind power potential, our study suggests that still the horizon is bright for this particular application in the wind energy sector and that European aspirations for a 100% renewable energy grid are without our collective grasp technologically.

## **6. References**

- [1] M. d. G. Carvalho, "EU energy and climate change strategy," *Energy* , vol. 40 , pp. 19-22, 2012 .
- [2] K. Marvel, B. Kravitz and K. Caldiera, "Geophysical limits of global wind power," *Nature Climate Change*, vol. 3, pp. 118-121, 2013.
- [3] J. Arnqvist, "Mean wind and turbulence conditions in the boundary layer above forests," Acta Universitatis Upsaliensis, Uppsala, 2015.
- [4] Windeurope, "WIND IN POWER 2017," WINDEUROPE, Brussels, 2018.
- [5] European Commission, "Roadmap 2050: A PRACTICAL GUIDE TO A PROSPEROUS, LOW-CARBON EUROPE," European Commission, Brussels, 2010.
- [6] P. Enevoldsen and B. K. Sovacool, "Examining the Social Acceptance of Wind Energy: Practical Guidelines for Onshore Wind Project Development in France," *Renewable & Sustainable Energy Reviews*, vol. 53, pp. 178-184, 2016.
- [7] B. K. Sovacool and P. Enevoldsen, "One style to build them all: Corporate culture and innovation in the offshore wind industry," *Energy Policy*, vol. 86, pp. 402-415, 2015.
- [8] IRENA, "Renewable Power Generation Costs in 2017," International Renewable Energy Agency, Abu Dhabi, 2018.
- [9] S. V. Valentine, *Wind Power Politics and Policy*, Oxford: Oxford University Press, 2014.
- [10] P. Enevoldsen and S. V. .. Valentine, "Do onshore and offshore wind farm development patterns differ?," *Energy for Sustainable Development*, vol. 35, pp. 41-51, 2016.
- [11] M. Z. Jacobson, M. A. Delucchi, Z. A. Bauer, S. C. Goodman, W. E. Chapman, M. A. Cameron, C. Bozonnat, L. Chobadi, H. A. Clonts, P. Enevoldsen, J. R. Erwin, S. N. Fobi, O. K. Goldstrom and E. Hennessy, "100% Clean and Renewable Wind, Water, and Sunlight All-Sector Energy Roadmaps for 139 Countries of the World.," *Joule*, vol. 1, 2017.
- [12] B. Sovacool, "Contestation, contingency, and justice in the Nordic low-carbon energy transition," *Energy Policy*, vol. 102 , pp. 569-582, 2017.
- [13] European Environment Agency, " Europe's onshore and offshore wind energy potential An assessment of environmental and economic constraints," European Environment Agency, Brussels, 2009 .
- [14] C. L. Archer and M. Z. Jacobson, "Evaluation of global wind power," *Journal of Geophysical Research*, vol. 110, 2005.

- [15] The Global Wind Atlas, *Global Wind Atlas 2.0, a free, web-based application developed, owned and operated by the Technical University of Denmark (DTU) in partnership with the World Bank Group, utilizing data provided by Vortex, with funding provided by the Energy Sector Managem*, 2017.
- [16] European Commision, "[http://ec.europa.eu/environment/nature/natura2000/index\\_en.htm](http://ec.europa.eu/environment/nature/natura2000/index_en.htm)," 2018. [Online]. [Accessed 4 June 2018].
- [17] B. Sliz-Szkliniarz and J. Vogt, "GIS-based approach for the evaluation of wind energy potential: a case study for the Kujawskoe Pomorskie Voivodeship," *Renewable Sustainable Energy Reviews* , vol. 15, pp. 696-707, 2011.
- [18] Y. Noorollahi, H. Mohammadi and M. Yousefi, "Multi-criteria decision support system for wind farm site selection using GIS," *Sustainable Energy Technologies and Assessments*, vol. 13, p. 38–50, 2016.
- [19] B. Sovacool, "Energy studies needs social science," *Nature* , vol. 511 , p. 529–530, 2014.
- [20] P. Enevoldsen and F.-H. Permien, "Mapping the Wind Energy Potential of Sweden: A Sociotechnical Wind Atlas," *Journal of Renewable Energy*, vol. 2018, 2018.
- [21] QGIS, "<https://qgis.org/en/site/>," 2018. [Online]. [Accessed 3 April 2018].
- [22] D. Voivontas, "Evaluation of Renewable Energy Potential Using a GIS Decision Support System," *Renewable Energy*, vol. 13, pp. 333-344, 1998.
- [23] P. Hou, W. Hu, M. Soltani and Z. Chen, " Optimized Placement of Wind Turbines in Large Scale Offshore Wind Farm using Particle Swarm Optimization Algorithm," *IEEE Transactions on Sustainable Energy*, vol. 6, no. 4, pp. 1272-1282, 2015.
- [24] P. Enevoldsen, "Onshore wind energy in Northern European forests: Reviewing the risks," *Renewable & Sustainable Energy Reviews*, vol. 60, p. 1251–1262, 2016.
- [25] P. Enevoldsen and M. Z. Jacobson, "Data Investigation of Installed and Output Power Densities of Onshore and Offshore Wind Turbines Worldwide," *Renewable Energy*, 2018.
- [26] P. Enevoldsen, S. V. Valentine and B. K. Sovacool, "Insights into wind sites: critically assessing the innovation, cost, and performance dynamics of global wind energy development," *Energy Policy*, vol. 120, pp. 1-7, 2018.